



Bluetooth Fingerprint Padlock

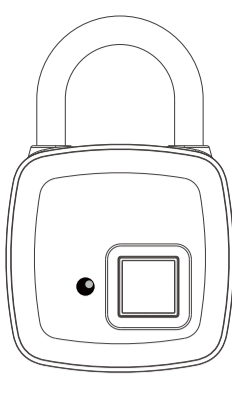

I . USB Interface:

The product is charged by USB. Please fully charge the product for the first time.



Components:
 1.USB Port 2.Fingerprint Reader
 3.LED Light 4.Lock Beam


II . Indicator

Use 3-color indicator. Different indicator represents different devices and status.


Please check the details as below chart:

Indicator status	Function
Low power	Red light flash
Charging	Green light always on
Full charged	Lights off
Green light flash	Fingerprint collection mode
Green light always on	Successful to Register Fingerprint
Blue light always on	Administrator fingerprint authorization
Green light always on	Unlocked successfully
Red light always on	Delete fingerprint mode
Red light flash	Failed to collect fingerprint

III . Description Of First Administrator' s Fingerprint Record

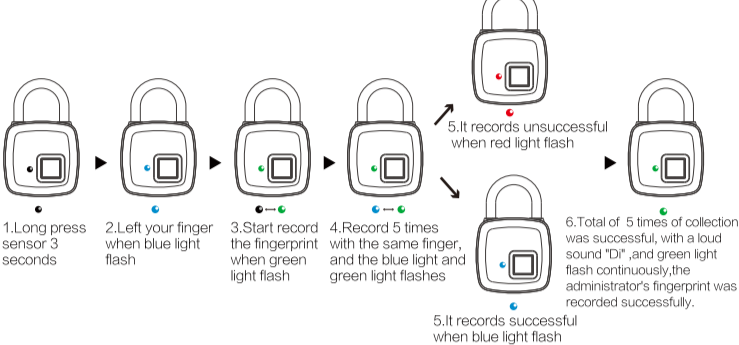


IV . Number 2 to 40 Fingerprint Recording Instructions

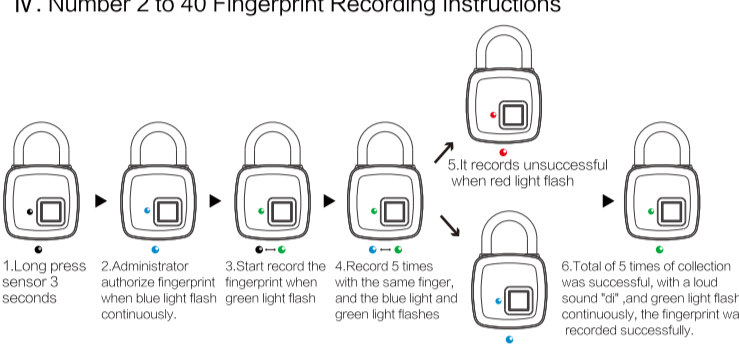

Remarks:
 1. The first and second fingerprints are the administrator fingerprint by default.
 2. Collecting the second to forty fingerprints requires administrator fingerprint authorization.

V . Description Of Delete Fingerprint

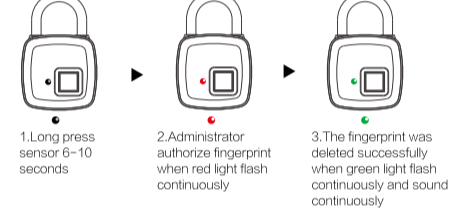

Remarks:
 Only the administrator can delete the fingerprint and delete all the fingerprints at once.

VI . Low Voltage

When the voltage $\leq 3.5V$, the red indicator flash fast for 15s. If keep in the status of low batter, it will alarming per minute.

VI.Specifications

Support 360 degree angel fingerprint recognize
 Resolution: 508DPI
 ESD: +/-12kV air, +/-8kV contact
 FR: <1%
 FAR: <0.002%
 Recognize time: <300ms
 Battery: 3.7V 300mAh
 Charger: 5V 0.5A

VII. APP Operation Instructions

LuckLock APP Compatible with iOS and Android Operating System , Connect with fingerprint lock via Bluetooth. Users can unlock fingerprints through LuckLock APP, Fingerprint addition, Fingerprint emptying, Fingerprint lock renaming, Fingerprint Lock Password Modification, Functions such as unlocking history view and so on. The method of use is as follows.:

1. Download and Install "LuckLock" App

(IOS system download in App Store, The Android operating system can be downloaded on Google Play or by scanning the qr code below).



Android



Google Play




iOS

2. Bluetooth Paired Connection

- Finger touch fingerprint lock fingerprint sensor, Wake up the machine and turn on Bluetooth, Open LuckLock APP, APP automatically searches for fingerprint lock devices nearby.
- When LuckLock appears on the screen (as shown below), Click LuckLock to connect the fingerprint lock. Note: Lucklock is the device name and can be renamed on APP.
- Jump out of the password modification window and set the fingerprint lock password. Note: The password set here should be used when changing the mobile phone to connect to this device.




- Enter the device naming column and name the current fingerprint lock. After entering the name, click OK.
- Bluetooth matching is successful. It can control fingerprint lock, fingerprint input and other operations by mobile phone.
- When the device is disconnected, operates "LuckLock" APP, which reminds you to connect the device automatically by clicking on the device name. When the connection is successful, the device name is marked with blue dots at the end.

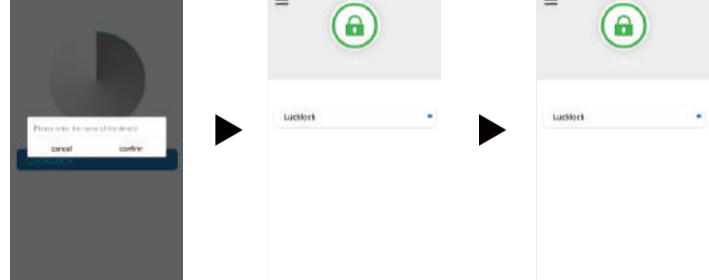

3. Function Introduction

Click on the top left corner icon, Enter the menu settings interface, such as the right one:

- Modify name:**
You can modify the current fingerprint lock name here.
- Password and Fingerprint:**
You can add fingerprints, empty them and change passwords here.
- Historical record:**
You can see which fingerprint was unlocked at what time.
- Scanning:**
Fingerprint locks that can scan nearby.
- Restore factory settings:**
Clear all the data and restore the initial state of the factory.
- disconnect:**
Disconnect equipment from APP.
- voice choice:**
Simplified Chinese / English / German / Russian / French Japanese / Spanish is optional.

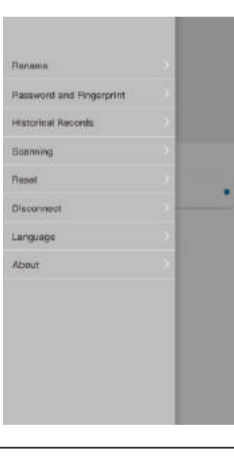

4. APP Fingerprint Addition and Deletion Methods:

- Use APP to add fingerprint method:
 - Click to add a fingerprint
 - The following interface appears (Fingerprint lock green indicator flashes, indicating that fingerprints can be added)
 - Successful single acquisition, bright red screen fingerprint lines.



- Using APP to Delete Fingerprints:
 - Click to empty your fingerprint.
 - Fingerprint lock "DING" loud, APP interface appears clear fingerprint success. At this point, all the fingerprints of the fingerprint lock are cleared.

