



2 wires Electric bolt lock with low temperature and time delay

BL-C2001B

1. Fail Safe : power to lock

Face Plate	205Lx35WX40H(mm)
Strike plate	90Lx25Wx2H(mm)
Bolt	16mm(Throw) x 16mm(Diameter)

2. Bolt lock Suitable For Wooden Door, Metal Door, Glass Door

Fail Safe	Power to lock
Voltage	DC12V
Start Current	960mA
Standby Current	130mA
Face place material	High Aluminum, Carrulous Line
	Finished

3. BL-C2001B bolt lock with delay timer

Suitable for	All types of 180° door
Operating temp	-10~25℃ 14-131F
Operating Humidity	0~90%(non-condensing)
Special Designed	Tested to 500000 cycles
Weight	0.9kg
Standard Packing	30pcs



01

Aluminium Alloy material



02

Time delay


Time delay with 0/3/6Second



03

Hex socket screw

Hex socket screw fix the plate

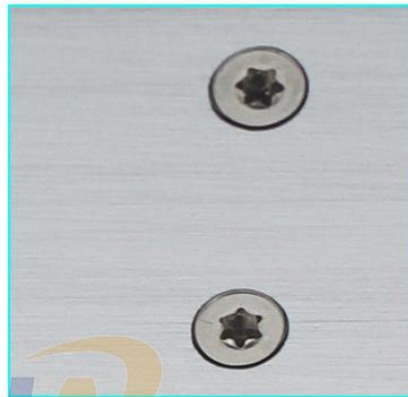

04

Cylinder

Power off PCB board with circuit design



