



RFID Access Card Reader



PCD-100 White



PCD-100 Black

Product Advantages

- PCD-100EM: 125KHz Proximity card reader
- PCD-100MF: 13.56MHz Mifare card reader
- Read Range: Up to 10CM(125KHz)/5CM(13.56MHz)
- Easy to install on Metal Door Frame or Mullion
- External LED Control
- Waterproof IP65

Specifications

| | |
|------------------------------|---|
| Read Range | PCD-100EM: Up to 10CM, PCD-100MF: Up to 5CM |
| Reading Time (Card) | ≤300ms |
| Power / Current | DC6-14V/Max.70mA |
| Input Port | 2ea (External LED Control, External Buzzer Control) |
| Output Format | 26bit/34bit Wiegand (default) |
| LED Indicator | 2 Colour LED Indicators(Red and Green) |
| Beeper | Yes |
| Operating Temperature | -20°C ~ 65°C |
| Operating Humidity | 10% ~ 90% relative humidity non-condensing |
| Colour | Black, White |
| Material | ABS+PC with texture |
| Dimension | 114x76x16mm |
| Weight | 50g |


Indicator light




- Standby mode
- Swipe card successful



Dimensions(mm)

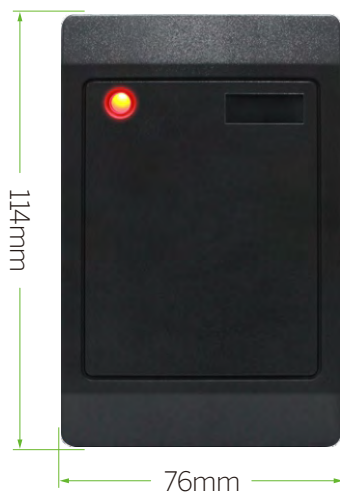

PCD-100 Black

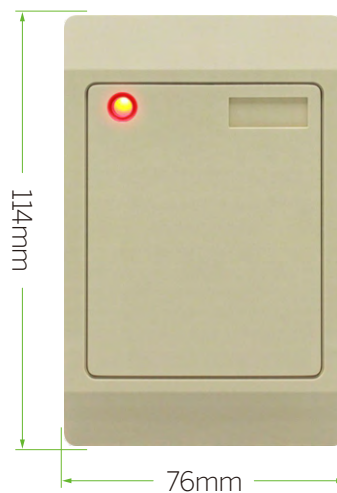

PCD-100 White



S4A Industrial Co., Limited

Address: 2nd floor of Jinmin'an Industrial Zone, #529,
Bulong Rd. Bantian St. Longgang Dist. Shenzhen, PRC.

Tel: +86 755 29450011

www.s4a-access.com / Email: sales@s4a-access.com
Mob/Whatsapp/Wechat/Viber: +86 134 1050 0721